# SUPER**TOUCH**®



#### Colourways:

White Orange

Blue

Red



### Supertex® SMS Type 5/6 Coverall

#### **Description:**

Our Supertex® SMS Coveralls offer type 5/6 protection, against dust particles, low risk chemical splash and protection of barrier to radioactive particulates. Making them perfect for tasks ranging from asbestos removal, insulating, paint spraying, hygiene rules, use with low risk chemicals, horticulture, farming and general building work.

✓ Cat III Complex Design

- ✓ Type 5 EN 13982-1 Protection against airborne solid particles
- ✓ Type 6 EN 13034 Protection against low risk chemical splash
- ✓ EN 1073-2 Class 2 Protection of barrier to radioactive particulates
- ✓ Protects against dust particles
- ✓ Lint Free
- ✓ Breathable
- ✓ Zip with zip guard
- ✓ Elasticated wrist/ankle closure
- ✓ Elasticated 3 panel hood design
- ✓ Individually wrapped

#### Applications:

Suitable for Asbestos related work, insulating, hygiene rules, clean rooms, liquid chemicals (low hazard), paint spraying, horticulture, farming & General building work.

Note: When working with asbestos removal activity suitable PPE must be worn at all times.


#### **Product Codes:**

17601-7	S - 4XL	Coverall - White
17611-7	S - 4XL	Coverall - Blue
17621-7	S - 4XL	Coverall - Red
17681-7	S - 4XL	Coverall - Orange

Standards:



EN 13034:2005+A1 :2009 (Type 6) PPE Regulation (EU) 2016/425 and PPE Regulation (EU) 2016/425 as brought into UK law, EN 13982-1:2004/A1:2010 Type 5 Protection EN 13034:2005+A1:2009 Type 6 Protection EN 1073-2:2002 Class 2

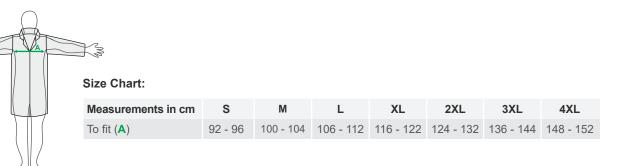

EN 1073-2:2002

Class 2

Issue No.: 6 Issue Date: 02.08.2022

## SUPERTOUCH<sup>®</sup>

Packaging: 1 piece per bag - 50 bags per case

**Outer Carton Artwork:** 



Feature Symbols:



Single use only Do not reuse



Product packed in retail bags

The information shown on this specification sheet is intended as a guide and is advisory only. All details were correct at the time of issue. As conditions of use are ultimately beyond our control, we advise that the product is tested for the particular application before use.